


NT Branded Handrail

Installation & Maintenance Guidelines




Inspection & Adjustments:


1. Clean or replace all rollers and belts in contact with handrail surface.

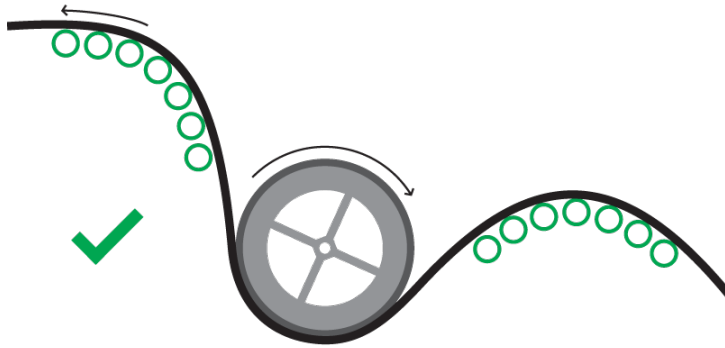

2. Ensure correct handrail slack.

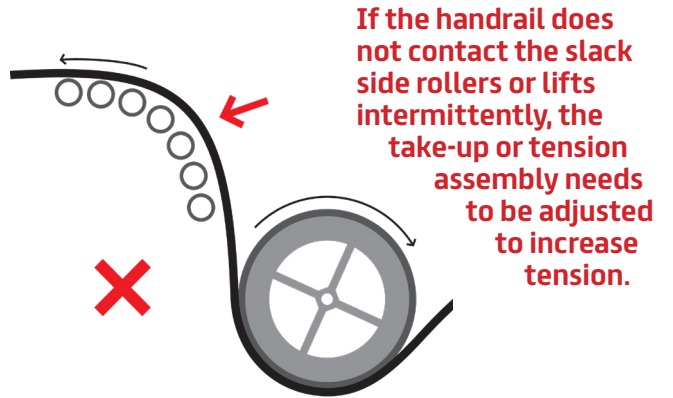

3. Avoid unintended contact with handrail, including protruding fasteners and poorly adjusted inlets.

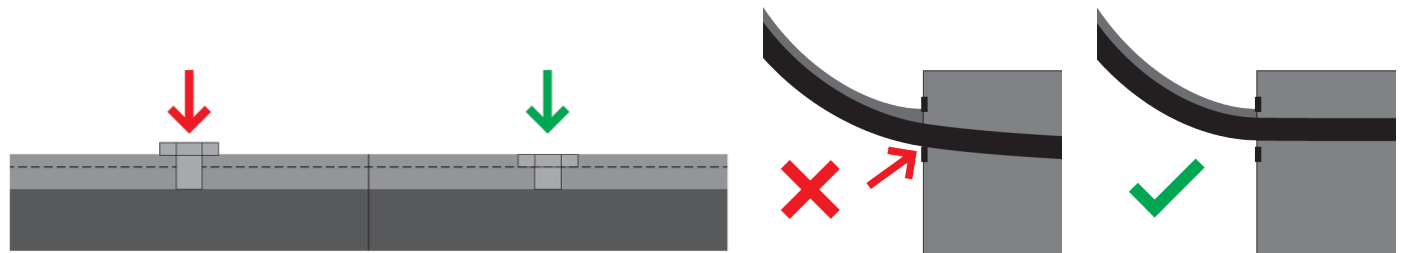

Graphics are embossed onto the handrail surface and will not peel or lift, however they can be damaged by unintended contact within the escalator.


Optimal



Dirty



Contact

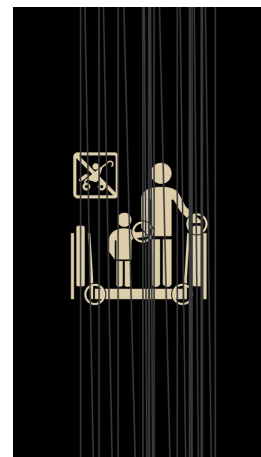

Draka EHC

A Brand of Prysmian Group

Draka EHC
1287 Boundary Road, Oshawa, ON Canada L1J 6Z7
Office +1-905-432-3200 | Customer Care +1-905-432-3124
www.DrakaEHC.com | www.prysmiangroup.com